



Catalogue
FOOD SERVICE
Chapter
COOK & CHILL

Specific model
ABC-051 Heat-P CI 230V 1N 50Hz

19095303

24/10/2023

DENOMINATION:

Blast chiller and freezer Advance, 5 levels for GN-1/1 trays, 5 levels for 60X40 trays and at 50Hz.


DESCRIPTION :

- Temperature blast chillers with 5" touch control panel.
- Refrigeration and freezing blast chilling cycles, configurable to be managed by time or temperature probe placed in the core of the food (if the probe is not used, the cycle is automatically managed by time).
- In both refrigeration and freezing, two types of blast chilling cycles can be carried out:
 - Strong cycle: Defined by default in the freezing cycles, it performs the cycle keeping the chamber temperature constant at -20°C.
 - Soft cycle: Defined by default in the refrigeration cycles, it performs an initial cycle maintaining the chamber temperature at 0°C.
- The duration of the abatement cycles by means of time management are:
 - Refrigeration cycles: 90 minutes.
 - Freezing cycles: 240 minutes.
- 5 additional special cycles for the management of defrosting, hardening of ice cream, drying, sanitising of fish and heating of the skewer probe.
- At the end of the cycle, the blast chiller works as a refrigeration cabinet, maintaining the temperature between +2 and +4 °C, or as a frozen food maintenance cabinet, below -18 °C.
- Hermetic compressor with ventilated condenser.
- Ecological refrigerant R-452A CFC-free.
- Model ABC-031 R290 with R-290 refrigerant.
- 60 mm injected polyurethane insulation (except for 031 models, 35 mm). Density of 40 kg. CFC-free.
- Copper tube evaporator and aluminium fins.
- Forced draught cooling.
- User-activated defrost device. Automatic evaporation of condensation water without electrical power supply.
- Internal guides included.
- British plug.

POSSIBLE OPTIONS :

- Wheels Kit (Factory Assembly)
- Opposite Opening
- USB port data extraction

DIMENSIONS



X Width	790 mm	X Gross width	895 mm
Y Depth	700 mm	Y Gross depth	810 mm
Z Height	850 mm	Z Gross height	1065 mm
Net Weight	106,0 kg	Gross Weight	110,0 kg
Net volume	0,470 m3	Gross volume	0,772 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	1,200 kW
Amperage (A)	6,2A
Voltage	230V - 1N
Electric frequency	50Hz

GAS TECHNICAL SPECIFICATIONS

Gas type	R-452A
----------	--------

COLD TECHNICAL SPECIFICATIONS

Refrigeration power	0,690 kW
Climate class	5
Cooling gas load	850,000 g

CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X2,5+T - 12 A
Three-phase +N 400V wiring	4X1,5 +T - 12 A

OTHERS

Condensation system	Vent.
---------------------	-------

TECHNICAL FEATURES

Number of trays	5
-----------------	---






Catalogue
FOOD SERVICE
Chapter
COOK & CHILL

Specific model
ABC-051 Heat-P CI 230V 1N 50Hz

19095303

24/10/2023

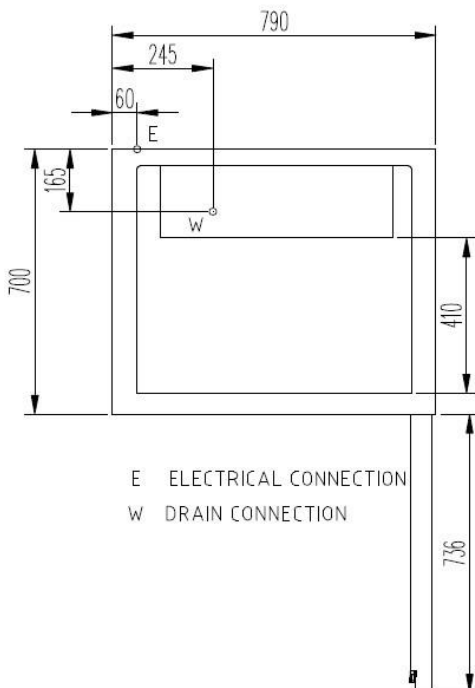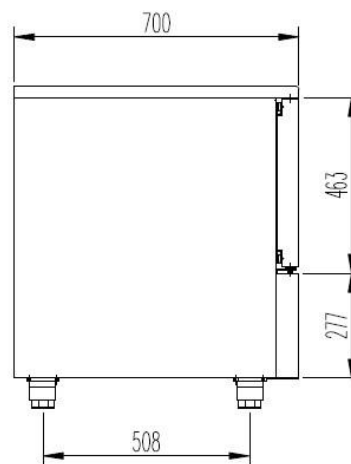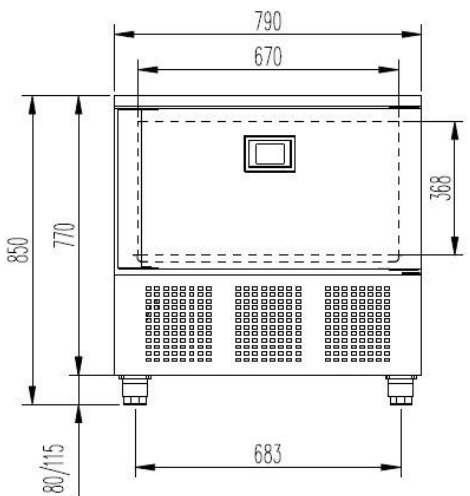

E ELECTRICAL CONNECTION
W DRAIN CONNECTION

Dimensiones Interiores	mm	670x410x380
Internal Dimensions		
Tipo Abatidor		Mixto
Type Blast Chiller		
Capacidad GN	nº	5 GN1/1
Capacity GN		
Capacidad EN	nº	5 EN
Capacity EN		
Separacion entre bandejas	mm	65
Interstep trays		
Espesor aislamiento	mm	60
Thickness		
Medidas hueco puerta	mm	670x368
door opening measures		

Capacidad según EN17032 (Refr. +65 °C à +10 °C en 120'; Cong +65 °C à -18 °C en 270')