

Halcyon AMH45 D

undercounter
GLASSWASHER

halcyon®

Halcyon **AMH45 D** Features

- **1 year warranty**
- Drain pump as standard
- Accurate detergent and rinse aid peristaltic dosing pumps
- Dosing set up by fascia controls
- Easy clean parallel wash and rinse arm assembly
- Surface scrap tray filters as standard
- Large three button control



Two 450 x 450mm open cup/
glass racks supplied as standard –
capable of holding 20 pint glasses.

Additional racks can be
purchased at point of order:

Q902300AB



Gravity drain version
available: **AMH45**

For additional information contact our Sales Team on

T: **0345 130 8070** E: **sales@maidaid-halcyon.co.uk** or visit **www.maidaid.co.uk**

Halcyon AMH45 D

undercounter GLASSWASHER




Technical Data

Dimensions (W x D x H)	mm	525 x 560 x 705 + Feet	Wash tank element	kW	1.4
Feet height	mm	10-20	Boiler element	kW	2.6
Rack size	mm	450 x 450	Wash pump	kW	0.18
Maximum useable height	mm	280	Tank capacity	L	14
Door opening	mm	305	Noise emission	dB	≤ 55
Theoretical productivity	Racks/h	30	Packaging Specs		
Effective productivity	Racks/h	24*	Gross weight	Kg	50
			Cubic volume	m ³	0.37
			Dim. (W x D x H)	mm	640 x 580 x 870

*Allowing 30 seconds for reloading
Cycle times may vary depending on local conditions/services

Installation Diagram – All services must be within 1 meter

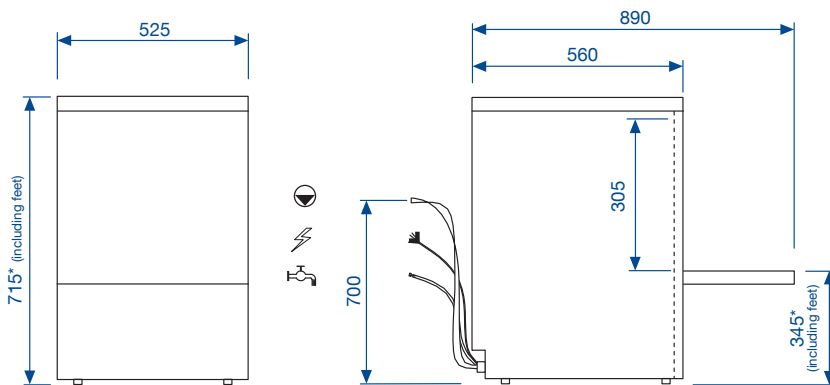


*Height-adjustable feet + 10mm

Power Supply

Installed power	AMP	kW
230V – 50Hz – 1N	13*	2.8

*Supplied with 13A moulded plug and lead



Water Connection

Inlet water pressure	Bar	2 to 4
Flow rate L/Min	L/Min	6
Water inlet temp	°C	10 to 50
Water connection	BSP	¾"
Waste connection	Ø	Int 16.8/ext 21.6

Cycle Information

Number of standard cycles		1
Standard cycles times	Sec	120
Special cycle		N/A
Self-cleaning cycle		Partial
Water consumption per cycle	L	2.0
Wash temperature	°C	60
Rinse temperature	°C	65

For additional information contact our Sales Team on

T: **0345 130 8070** E: **sales@maidaid-halcyon.co.uk** or visit **www.maidaid.co.uk**