



Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CUN-22G C CI 230V 1N 50Hz

19090900

23/01/2024

DENOMINATION:

Freezer cabinet - Concept Gastronorm with 2 compartments and 2 door, at 50Hz.

DESCRIPTION :

- Structure built with AISI-304 stainless steel.
 - 60 mm, 40 kg/m³ injected polyurethane insulation.
 - Embedded inner tray slides. Storage trays at 23 different levels 55 mm from each other.
 - Forced draught cooling system with hermetically sealed compressor.
 - Copper piping and aluminium flaps evaporator.
 - Digital display for electronic and digital control of temperature and defrosting.
 - Opened door delay alarm.
 - Self-closing and stay open doors. When opened less than 90° they close by themselves. When opened more than 135° they stay open.
 - Built-in drainage to get rid of waste liquids inside the unit.
 - Embedded bottom and curved panels inside for easy cleaning and maintenance.
 - Height adjustable stainless steel legs.
 - Working temperature: from 0 °C to +8 °C (refrigerators) and from -18 °C to -22 °C (freezers).
 - Tested in climatic class 4..
 - Inner LED lights with power switch (in refrigerated cabinets and now also in freezing units).
- Freezer cabinet
Visibility: vertical LED light for greater visibility.

POSSIBLE OPTIONS :

- Stainless Backing
- Legs instead of castors
- Locks
- Pedal

STANDARD OPTIONS :

- Door frame resistance
- Castors
- UK plug

POSSIBLE ACCESSORIES :


- REFRIGERATION
- ACCESSORIES
- GASTRONORM GRIDS

SUPPLIED ACCESSORIES:

- 12037958 GN-2/1 GRID made in Epoxi (650x530) 6

DIMENSIONS

| | | | |
|------------|----------------------|----------------|----------------------|
| X Width | 1318 mm | X Gross width | 1460 mm |
| Y Depth | 842 mm | Y Gross depth | 880 mm |
| Z Height | 2040 mm | Z Gross height | 2063 mm |
| Net Weight | 227,0 kg | Gross Weight | 240,0 kg |
| Net volume | 2,264 m ³ | Gross volume | 2,596 m ³ |



ELECTRICITY TECHNICAL SPECIFICATIONS

| | |
|--------------------|-----------|
| Amperage (A) | 4,4 A |
| Electric frequency | 50Hz |
| Electric power | 0,749 kW |
| Voltage | 230V - 1N |

GAS TECHNICAL SPECIFICATIONS

| | |
|----------|-------|
| Gas type | R-290 |
|----------|-------|

COLD TECHNICAL SPECIFICATIONS

| | |
|---------------------------|------------------|
| Annual elec. consumption | 4793,00 kWh |
| Clasif. Energy efficiency | E |
| Climate class | 4 |
| Cooling gas load | 138,000 g |
| Energy Efficiency Index | 83,81 % |
| Frozen net.vol | 874 L |
| Gross internal volume | 1186 L |
| Model Type | Vertical cabinet |
| Power consumption 24h | 13,27 kWh |
| Refrigeration power | 0,907 kW |

CONNECTIONS TECHNICAL SPECIFICATIONS

| | |
|--------------------------|----------|
| Single-phase 230V wiring | 2X1+T-4A |
|--------------------------|----------|

OTHERS

| | |
|---------------------|-------|
| Condensation system | Vent. |
|---------------------|-------|







Catalogue
FOOD SERVICE
Chapter
REFRIGERATION



Specific model
CUN-22G C CI 230V 1N 50Hz

19090900



23/01/2024

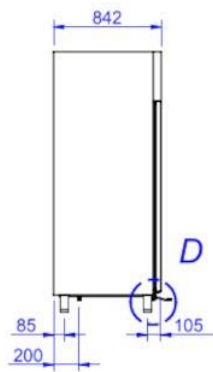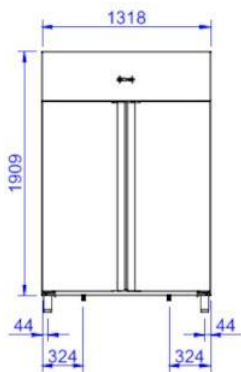


SECTION B-B

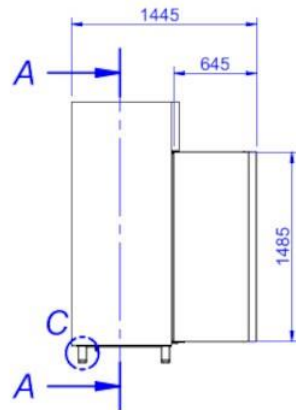


SECTION A-A




E
ELECT.



"R" OPTION



C
132 < X < 192



D
"PD" OPTION