



## ESLR6C - Lincat Silverlink 600 Electric Free-standing Oven Range - Castors at Rear - 4 Plates - W 600 mm - 11.0 kW

Produce a wide range of delicious food with the large capacity fan assisted oven and four hotplates.

- ✓ Fan assisted oven provides uniform heat distribution and consistent cooking
- ✓ Castors at rear to enable unit to be pulled out for deeper cleans
- ✓ Double insulated doors, side and back panels providing safer operation, greater efficiency and economy
- ✓ Fully pressed and sealed hob, and removable oven base for easy cleaning and maintenance
- ✓ Four hotplates 2 x 2.0kW, 2 x 1.5kW
- ✓ Large capacity oven for increased productivity
- ✓ Six-position control knob for each plate
- ✓ Suitable for single or three phase applications

### Specifications

#### Summary

<b>Brand</b>	Lincat
<b>Range</b>	Silverlink 600
<b>Power Type</b>	Electric
<b>Unit Type</b>	Free-standing
<b>Available in UK Only</b>	No
<b>UK Warranty</b>	2 Years Parts and Labour Warranty
<b>Export Warranty</b>	Contact your local dealer
<b>GTIN</b>	5056105121336

#### Power and Performance

<b>Total Power kW</b>	11.0
<b>Temperature Range °C</b>	50-250
<b>IP Rating</b>	IP34
<b>Cooking Area (Width x Depth) mm</b>	600 x 600
<b>Temperature Control</b>	Mechanical
<b>Rating per Hob kW</b>	2 x 2.0, 2 x 1.5
<b>Oven Rating kW</b>	4.0

#### Key Specifications

<b>Number of Shelves included</b>	2
<b>Number of Shelf Positions</b>	4
<b>Number of Hobs</b>	4
<b>Shape of Hob</b>	Round

#### Weights and Dimensions

<b>Unit Height (External) mm</b>	93
<b>Unit Width (External) mm</b>	60
<b>Unit Depth (External) mm</b>	72
<b>Height (Internal) mm</b>	428
<b>Width (Internal) mm</b>	470
<b>Depth (Internal) mm</b>	350
<b>Shelf Dimensions Width mm</b>	455
<b>Shelf Dimensions Depth mm</b>	335
<b>Hob Dimensions mm</b>	600 x 600
<b>Net Weight Kg</b>	60

#### Supply Connections

<b>Requires Installation</b>	Yes
<b>Requires Electrical Supply</b>	Yes
<b>UK 3 Pin Plug</b>	No
<b>Requires Hardwiring</b>	Yes
<b>Electrical Supply Rating Watts</b>	11,000
<b>Single Phase Amps</b>	47.8
<b>Single Phase Voltage</b>	230
<b>Three Phase Amps</b>	L1=17.4; L2=15.2; L3=15.2
<b>Three Phase Voltage</b>	400

#### Shipping


<b>Packed Weight Kg</b>	72.5
<b>Packed Height cm</b>	110
<b>Packed Width cm</b>	70
<b>Packed Depth cm</b>	80

Available Accessories

SLR6/SB

SPLASHBACK SLR6

Technical Picture

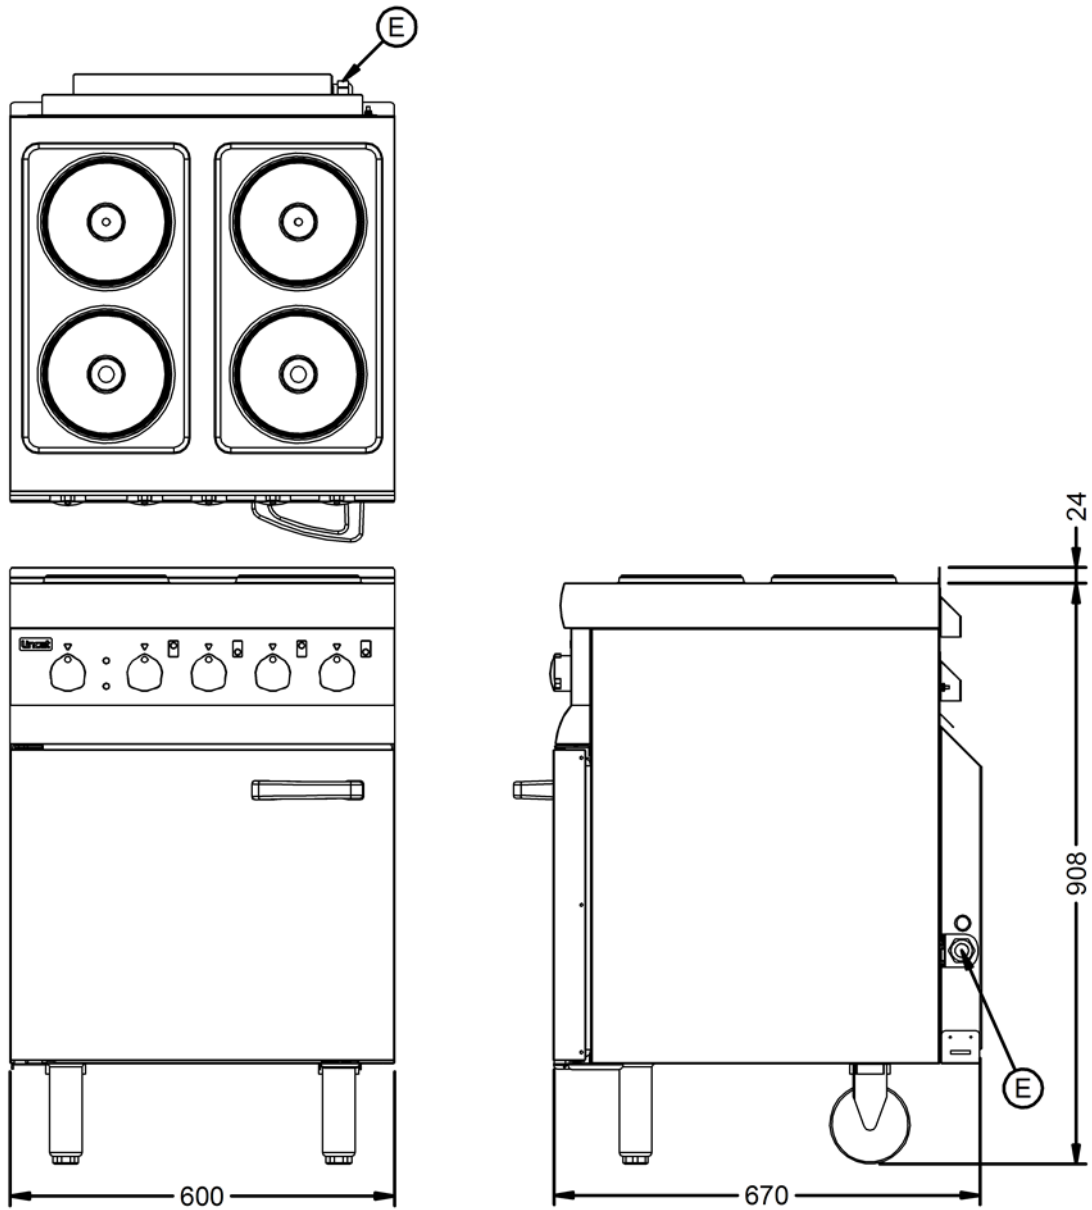



#### Lincat Limited

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of



#### Customer Care

**Tel:** +44 1522 875500  
**Email:** [care@lincat.co.uk](mailto:care@lincat.co.uk)

#### Export Customers

**Tel:** +44 1522 503250  
**Email:** [export@lincat.co.uk](mailto:export@lincat.co.uk)

#### Opening Hours

**Monday – Friday:**  
8.30am – 5pm