

Technical data sheet for

## **SINGLE PAN GAS FRYER 400mm**

GT18

- 400mm wide single pan fryer
- 25kW (gross) multi-jet target burner
- Easy clean stainless steel open pan
- 18L oil capacity
- V-tank with cool zone
- 30mm drain valve
- Rear rollers
- Stainless steel exterior
- Easy service
- Fully modular



GT18

### **Overall Construction**

- Stainless steel pan
- Bull nose welded 1.2mm 304 stainless steel
- Splashback 1.2mm 304 stainless steel
- Side panels 0.9mm 430 stainless steel
- Double skin door with 0.9mm 304 stainless exterior
- Vitreous enamelled front panel
- 30mm drain valve
- 63mm dia. heavy-duty 1.2mm 304 stainless steel adjustable legs at front and two rollers at rear
- 2 baskets and stainless steel lid supplied standard

### **Controls**

- Mechanical thermostat
- Thermostat range 100 – 190°C
- Over-temperature safety cut-out
- Millivolt gas valve system (no electrical supply)
- Flame failure protection

### **Cleaning and Servicing**

- Open stainless steel pan for easy clean
- Easy clean basket support bar
- 30mm drain valve for effective draining
- Easy clean stainless steel exterior
- Access to all parts from front of unit

# Technical data sheet for SINGLE PAN GAS FRYER 400mm

## Specifications

### Production rate

25kg/hr

### Pan size

Oil capacity 18L (32lbs shortening)

Width 305mm

Length 380mm

Oil frying depth 95mm

### Baskets

2 nickel plated wire baskets

140mm W x 335mm D x 145mm H

Nickel plated wire basket grid

### Burners

Multi-jet target burner

### Gas power (gross)

25kW, 85,300 Btu/hr

### Gas connection

R 3/4 (BSP) male

40mm from RH side, 24mm from rear

222m from floor

All units incorporate Natural and

LP gas regulator

### Dimensions

Width 400mm

Depth 812mm

Height 915mm

Incl. splashback 1085mm

### Nett weight

57kg

### Packing data

0.54m<sup>3</sup>, 97kg

Width 870mm

Depth 495mm

Height 1255mm

### Gas types

Available in Natural gas and LP gas, please

specify when ordering

Other gas types on request

### Options

Adjustable feet at rear

Extra baskets


Side splash guards

Joining caps

Castors

Gas conversion kits

GT18

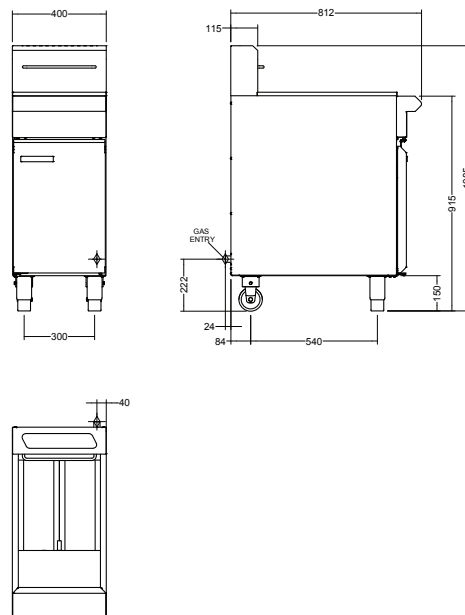

**BLUE SEAL**

[www.blue-seal.co.uk](http://www.blue-seal.co.uk)

[www.bluesealevolution.com](http://www.bluesealevolution.com)

## United Kingdom

### Blue Seal Limited

Unit 67

Gravelly Business Park

Gravelly

Birmingham B24 8TQ

England

Telephone 0121-327 5575

Facsimile 0121-327 9711

Email [sales@blue-seal.co.uk](mailto:sales@blue-seal.co.uk)

[www.blue-seal.co.uk](http://www.blue-seal.co.uk)

## Australia

### Moffat Pty Limited

740 Springvale Rd

Mulgrave

Victoria 3170

Australia

Telephone 03-9518 3888

Facsimile 03-9518 3833

Email [vsales@moffat.com.au](mailto:vsales@moffat.com.au)

[www.moffat.com.au](http://www.moffat.com.au)

## New Zealand

### Moffat Limited

16 Osborne St

PO Box 10-001

Christchurch 8011

New Zealand

Telephone 03-389 1007

Facsimile 03-389 1276

Email [sales@moffat.co.nz](mailto:sales@moffat.co.nz)

[www.moffat.co.nz](http://www.moffat.co.nz)



ISO9001  
Quality  
Management  
Standard

Designed and manufactured by

**MOFFAT**

ISO9001

All Blue Seal products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

CE

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

**BLUE SEAL EVOLUTION SERIES**®

© Copyright Moffat Ltd  
Moffat / 1.10 / 1357

