



# Product Code: HR150 3D

## Refrigerated Undercounter Cabinet with Drawers

---



### Features & Benefits

---

- Front breathing refrigeration system, suitable for use even in enclosed areas
- Easy to use microprocessor control with digital display on the front for easy visual reference
- Stainless steel exterior as standard with aluminium interior
- Roller castors to rear for ease of movement
- High quality magnetic door gasket
- Operate to ISO Climate class 4 up to 32°C ambient
- Three easy to use drawers give simple access to inventory

## Base Fittings

|                      |          |
|----------------------|----------|
| Castors - Rear Fixed | Standard |
| Levelling Bolts      | Standard |

## Electrical & Service Data

|                         |          |
|-------------------------|----------|
| Connect Load            | 70       |
| 230/50/1                | Standard |
| Fuse Required (A)       | 10       |
| Refrigerant Charge (kg) | 0.065    |

## Energy

|                          |        |
|--------------------------|--------|
| kWh (24 hours)           | 0.82   |
| AEC                      | 320.29 |
| Nett Volume              | 45.7   |
| Energy Grade             | A      |
| Global Warming Potential | 3      |
| Energy Efficiency Index  | 16.80  |

## Doors

|       |          |
|-------|----------|
| Solid | Standard |
|-------|----------|

## Specification

|                      |          |
|----------------------|----------|
| Refrigerator +3/+5°C | Standard |
| Width (mm)           | 605      |
| Depth (mm)           | 640      |
| Height (mm)          | 830      |
| Gross Volume (Ltr)   | 150      |
| Noise dBA @ 1m       | 68.8     |

## Refrigeration

|                               |          |
|-------------------------------|----------|
| HC                            | Standard |
| R134a - Industry Standard     | Option   |
| Integral Refrigeration System | Standard |

## Finish

|                   |          |
|-------------------|----------|
| s/s ext & alu int | Standard |
|-------------------|----------|


## Footnotes

- External cabinet depth excludes 25mm door handle
- Note: for ventilation, ensure that 50mm clearance is allowed above and around the cabinet
- Decibel rating measured 1m high from the floor and 1m from the cabinet

# Energy Performance Data and information



**Foster Refrigerator** - a division of ITW Ltd  
Oldmedow Road, KING'S LYNN, Norfolk PE30 4JU  
Tel: 0843 216 8800 Fax: 0843 216 4700  
Registered in England No. 00559693  
VAT No. GB 792 4414 16

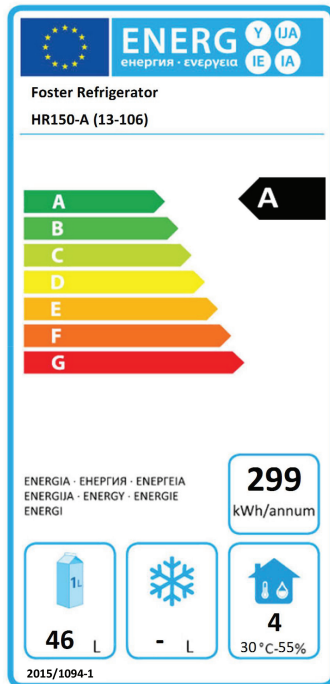

Master data version: Ver.01.0007AA

Generated: 21/06/2017

## Application

This appliance is intended for use in ambient temperatures up to {1}°C

## Safety

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.

## Recycling

For recycling and end of life care for this product, please refer to environmental section of the website or visit [our policies](#)



Energy



Quality



Value



Design



Hygiene



After Care

Foster Refrigerator, Oldmedow Road, King's Lynn, Norfolk, PE30 4JU

Phone 08432 168800 | Email [sales@foster-uk.com](mailto:sales@foster-uk.com) | Visit [www.fosterrefrigerator.com](http://www.fosterrefrigerator.com)

All images shown are for illustration purpose only. All images and photographs are not intended to be relied upon for, nor to form part of, any contract unless specifically incorporated in writing into the contract. Solely the dimensions and specifications incorporated in the quotation or purchase order confirmation shall be contractually binding.