

LINCAT OPUS NATURAL GAS FREE-STANDING TWIN TANK FRYER WITH PUMPED FILTRATION - 2 BASKETS - W 600 MM - 32.0 KW

MODEL: OG8111/OP/N



Fry delicious food accurately with this Opus 800 Free Standing Twin-Tank Gas Fryer which comes with two independent fryer tanks for greater versatility and a pumped filtration system that allows you to use the fryer again in less than five minutes. Ideal for a variety of busy commercial kitchens, whether it's a large pub or a restaurant, the fryer features convenient piezo ignition and has externally fired heating which allows for easy access for cleaning the tanks.

) pus 800

PRODUCT OPTIONS AND ACCESSORIES

- LK02 OPUS 350 LEG KIT
- OA8955 SPLASHGUARD FRYERS OPUS 800

PRODUCT FEATURES

- Two independent fryer tanks for greater versatility
- Convenient piezo ignition
- Pumped oil return enables the oil to be filtered and the fryer ready for use again in less than five minutes safe and convenient
- Oil can be filtered during or after service even whilst hot
- Externally fired heating gives easy access for cleaning tanks







LINCAT OPUS NATURAL GAS FREE-STANDING TWIN TANK FRYER WITH PUMPED FILTRATION - 2 BASKETS - W 600 MM - 32.0 KW

MODEL: 0G8111/0P/N

WEIGHTS & DIMENSIONS	
Width	600 mm
Depth	800 mil
Height	1070 mm
Weight	138 kg

SHIPPING DETAILS	
Ship Width	70 cm
Ship Depth	800 cm
Ship Height	122 cm
Ship Weight	151.8 kg
Number of Shipment Parcels	1
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No
Returnable Item	No

PRODUCT CERTIFICATIONS



ENERGY SPECS	
Primary Energy Source Type	Electricity, Gas
Electrical Amps	0.5
Electrical Voltage	230 volts
Electrical Watts	100
Electrical Phase	Single
Kilowatts	32 kW
Number of Electrical Conductor Wires	
Electrical Connection Type	Direct Hardwired
Electrical Plug Type	Hardwired
Number of Electrical Plugs	Not Applicable

Dedicated Circuit Required	Yes
Gas Type	Natural Gas
Gas Inlet Size	0.5 in
Gas Inlet Pressure Required	20 mBar
Gas Total BTUs	109189 BTU
Gas Consumption at Max Use Per Hour	$3.05{\rm m}^3$
Total Heat Input at Max Use	32 kW, 109189 BTU per hour
Energy Saving	No

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated January 23, 2024





LINCAT OPUS NATURAL GAS FREE-STANDING TWIN TANK FRYER WITH PUMPED FILTRATION - 2 BASKETS - W 600 MM - 32.0 KW

MODEL: 0G8111/0P/N

ADDITIONAL SPECIFICATIONS			
Auto Oil Top-Off	No	Number of Burners	4
Basket Lift Type	Not Applicable	Number of Vats (batteries)	2
Control Type	Mechanical	Total Oil Capacity (volume)	28
Filter Media Type (if applicable) ter a 4 Food Production Pate	2-Stage: Fine Tissue Fil- ter and Stainless Steel Filter	Oil Reclamation	No
		Oil Temperature Control	Mechanical
		Pumped Oil Filtration	Yes
	44kg chips - 12mm	Split Pot	Yes
	[frozen], 64kg chips - 12mm [chilled] per	Temperature Maximum	190°C
	hour	Temperature Minimum	90 °C
Fryer Type	Open Pot	Vat 1 Oil Capacity (volume)	14
Integrated Filtration	Yes	Vat 2 Oil Capacity (volume)	14
Number of Baskets	2		

BIDDING SPECIFICATIONS

Bidding Specifications Not Available.

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.










MODEL: 0G8111/0P/N

TECHNICAL DRAWING





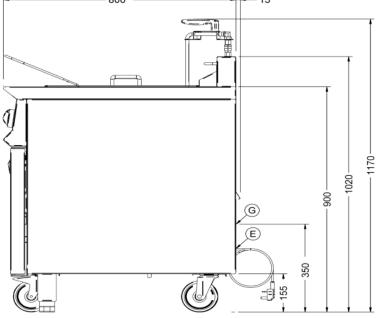

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated January 23, 2024

