

OVEN RANGE - 6-ZONE - W 900 MM - 36 KW [GAS] - 6 KW [ELECTRIC]

MODEL: PHDR01/P



Benefiting from the best of both - the focused, instant heat from the powerful gas burners, and the even cooking of the electric oven. Built to withstand the rigours of even the busiest kitchen, the large 4 x GN1/1 capacity oven is up to the task of delivering high volumes of top quality food, and enables four different foods to be cooked simultaneously. Strong and sturdy and built to last, the oven also comes with twin heavy-duty cast iron supports.

PRODUCT OPTIONS AND ACCESSORIES

OA8902 SPLASHBACK/SHFLE

PRODUCT FEATURES

- Powerful 6kW burners the pan will heat up quicker, speeding up processes such as boiling and sautéing, achieving a caramelised colour faster
- Fully pressed hob Simpler and quicker to clean
- Twin heavy-duty cast iron supports, built to withstand the rigours of the busiest kitchen
- Low flue, hob top accommodates larger pans
- Powerful 6kW twin fan assisted oven for more even cooking. Large 4 x GN1/1 capacity enabling four different foods to be cooked simultaneously
- 2 shelves and 5 shelf positions maximise oven space
- · Castors supplied as standard, not as a chargeable extra







LINCAT PHOENIX DUAL FUEL PROPANE GAS FREE-STANDING OVEN RANGE - 6-ZONE - W 900 MM - 36 KW [GAS] - 6 KW

MODEL: PHDR01/P

WEIGHTS & DIMENSIONS	
Width	900 mil
Depth	800 mil
Height	900 mil
Weight	125 kg

SHIPPING DETAILS	
Ship Width	100 cm
Ship Depth	85 cm
Ship Height	105 cm
Ship Weight	137.5 kg
Number of Shipment Parcels	1
Ship Method	LTL Common Carrier
Shipping Package Type	Pieces
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No

PRODUCT CERTIFICATIONS



ENERGY SPECS	
Primary Energy Type	Dual Fuel (residential only)
Electrical Amps Per Conductor	Single Phase 26.1/Three Phase L1=8.7; L2=8.7; L3=8.7
Electrical Total Amperage	26.1 A
Electrical Volts	230-400V
Electrical Total Wattage	6000 W
Electrical Kilowatts	6 kW
Electrical Plug Type	Hardwired
Number of Electrical Plugs	Not Applicable

Electrical Connection Type	Direct Hardwired
Number of Electrical Conductor Wires	1
Dedicated Circuit Required	No
Electrical Remarks	Single,Three
Gas Type	Propane
Gas Total BTUs	122832 BTU
Gas Inlet Size	0.75 in
Gas Inlet Pressure Required	37 mBar
Gas Consumption at Max Use Per Hour	2.58 m ³
Total Heat Input at Max Use	36 Kw, 122832 BTU per hour

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated January 09, 2025





LINCAT PHOENIX DUAL FUEL PROPANE GAS FREE-STANDING **OVEN RANGE - 6-ZONE - W 900 MM - 36 KW [GAS] - 6 KW**

MODEL: PHDR01/P

ADDITIONAL SPECIFICATIONS				
Construction Materials Stainless Steel		Open or Sealed Burners	Sealed	
Control Type	Rotary Control Knob	Oven Power Rating	6 kW	
Cooking Plate Finish Material Type	Cast Iron Plate	Oven Temperature Minimum	40 °C	
Exterior Trim Finish Color	Stainless Steel	Oven Temperature Maximum	250 °C	
Gastronorm Capacity	4 x GN1/1	Shelf Depth	512 mm	
High Altitude Kit Available	No	Shelf Width	710 mm	
Number of Heating Zones	6	Ventless Cooking Technology	No	
Number of Hot Top Burners	6	Cooking Equipment	Sealed Burner	
Number of Shelf Positions	5	BTUs Per Burner	6 KW	
Number of Shelves	2			

SELECT COOKING EQUIPMENT	NUMBER OF		POWER RATING	ARRANGE- MENT	WIDTH	DEPTH
Sealed Burner 1		6	6	Center	300 mm	300 mm
SELECT BASE EQUIPMENT	NUMBER OF		CUBIC CAPACITY EACH	WIDTH	DEPTH	HEIGHT
Standard Oven 1		1		715 mm	530 mm	400 mm

BIDDING SPECIFICATIONS

Bidding Specifications Not Available.

without incurring obligation. Dimensions nominal.

Document Auto-Generated January 09, 2025





Lincat reserves the right to modify specifications or discontinue models



MODEL: PHDR01/P

TECHNICAL DRAWING

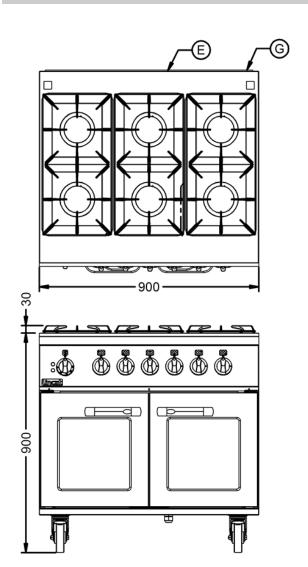



Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated January 09, 2025

